

Mechanical Jacks

Reel Jacks



CR321B Shown

Capacity Range► 5 - 20 tons
Stroke Range► 9.5 - 14 in.
Minimum Height Range► 21 - 34.5 in.

- Double-lever sockets for jacking in close quarters.
- Multiple-tooth pawls for strength & safety.
- Drop-forged, alloy steel, heat-treated components.
- Adjustable spring links for added serviceability.
- Plated springs to resist corrosion.
- Precision machining throughout.
- Steel lever bars sold separately.



CARRYING HANDLES

Convenient center mounted carrying handle makes this jack easy to position and move.



LAMINATED BASE

Treated laminated hardwood base provides solid support along with durability.



CE COMPLIANT

Our Jack design specifications meet or exceed ANSI /ASME B30.1 Safety Standards.

The large wooden bases and low handle efforts on these Reel Jacks enhance safety and reduce operator fatigue. ▼



CR320B



CRA1029R

Model	Capacity / Pair		Handle Effort per Tons (lbs)	Stroke (in)	Dimensions (in)					
	Side Hooks (tons)	Top Hooks (tons)			A	B	C	C ¹	C ²	C ³
					Minimum Height	Maximum Height	Minimum Height			
CR320B	5	10	72	9.5	20.75	30.25	15.25	---	---	---
CR321B	10	20	48	14	34.50	48.50	9.25	15.63	22.00	28.38
CRA1029R			40	11.63	31.13	42.75	24.87	---	---	---
CRA1029L				11.63	31.13	42.75	24.87	---	---	---

Mechanical Jacks

Reel Jacks




RECOMMENDED LEVER BARS

* Lever Bars Sold Separately


Reel Jack Model	Lever Bar Model
CR320B	SLB36
CR321B	SLB60
CRA1029R	SLB60
CRA1029L	SLB60

CR320B

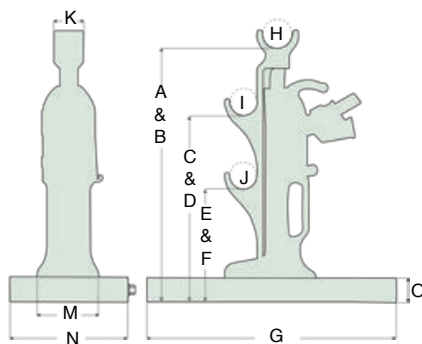


◀ Two CR321B Reel Jacks are used to support this cable spool for line feeding.

CR321B

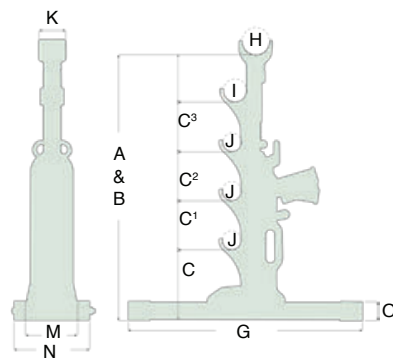

CRA1029R & CRA1029L

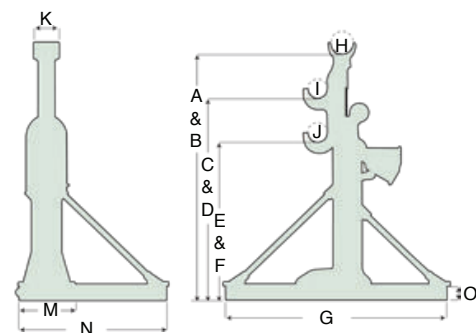

Dimensions (in)											Weight (lbs)	Model
D	E	F	G	H	I	J	K	M	N	O		
Maximum	Minimum	Maximum	Length	Diameter	Diameter	Diameter	Width	Length	Width	Height		
24.75	9.25	18.75	20.38	2.62	2.25	2.25	2.38	5.00	9.38	2.00	51	CR320B
---	---	---	30.37	3.63	3.00	2.38	3.50	6.50	9.75	2.50	125	CR321B
36.50	18.87	30.50	30.00	3.12	2.62	2.62	3.50	6.62	7.50	2.25	86	CRA1029R
36.50	18.87	30.50	30.00	3.12	2.62	2.62	3.50	6.62	7.50	2.25	86	CRA1029L